


\$\DESCRIPTION\$\DESCRIPTION \$\DESCRIPTION \$\


OUR VALUES


CARE **Treat others** the way they




would want to

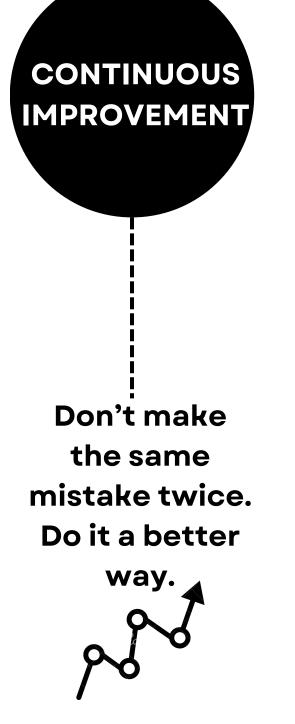

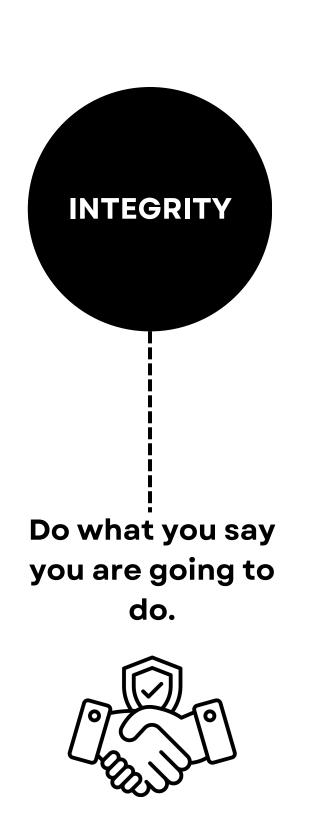

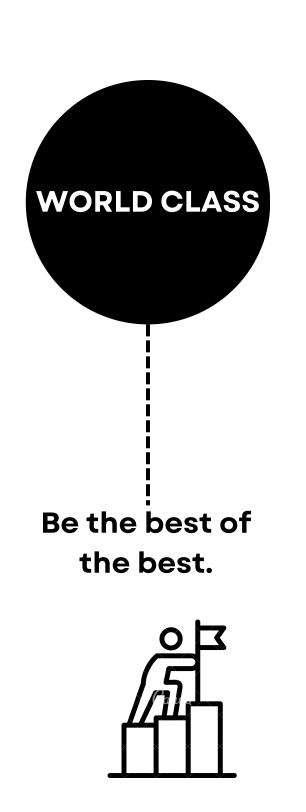

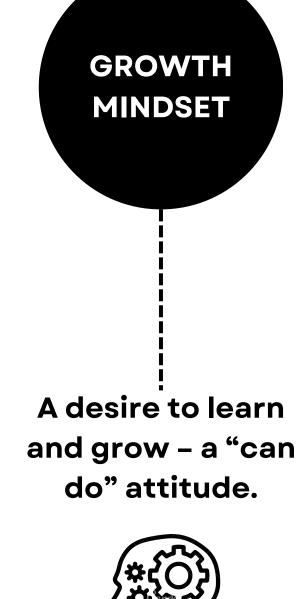





WHAT IS SLEEKFENCE™?


It all started with realizing that there was a major lack globally for a **modern** and fully private **fence solution** constructed from a material that would **last a lifetime** and available in **dark colors**.

With decades of experience in fence contracting, the founders of SLEEKFENCE™ networked with leading fence companies all around the world to create a horizontal fence system that anyone could install with ease.





WHY SLEEKFENCE™?

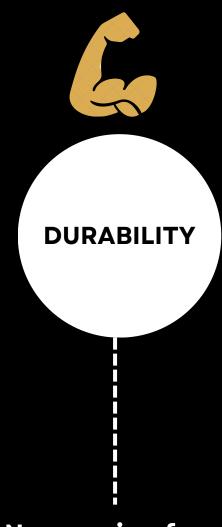

No warping from the sun.

Withstands hurricane winds.


High quality powder coat.



Zero rust.

No rotting.


Zero ongoing costs.

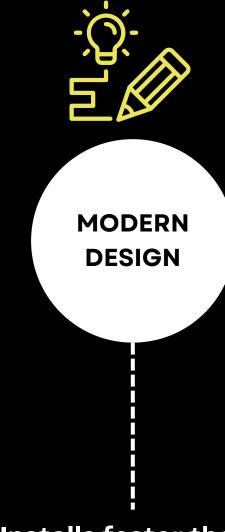

Installs faster than all other fence products.

Satin black finish as standard.

Modular system.

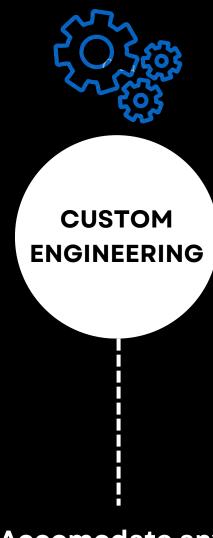

Accomodate any project!



Decades of experience in the field.


Guaranteed response within 24 hours.



WHY SLEEKFENCE™? Product comparison

	Rust and rot proof	Hurricane rated (HVHZ approved)	Resistant to sun damage	Zero maintenance	Looks beautiful	Lasts a liftetime	Environmentally friendly	High heat tolerance (Non- combustible)	Fast install
SLEEKFENCE™									
Cedar	X		X	X					
Vinyl									X
Chain-link	X				X				



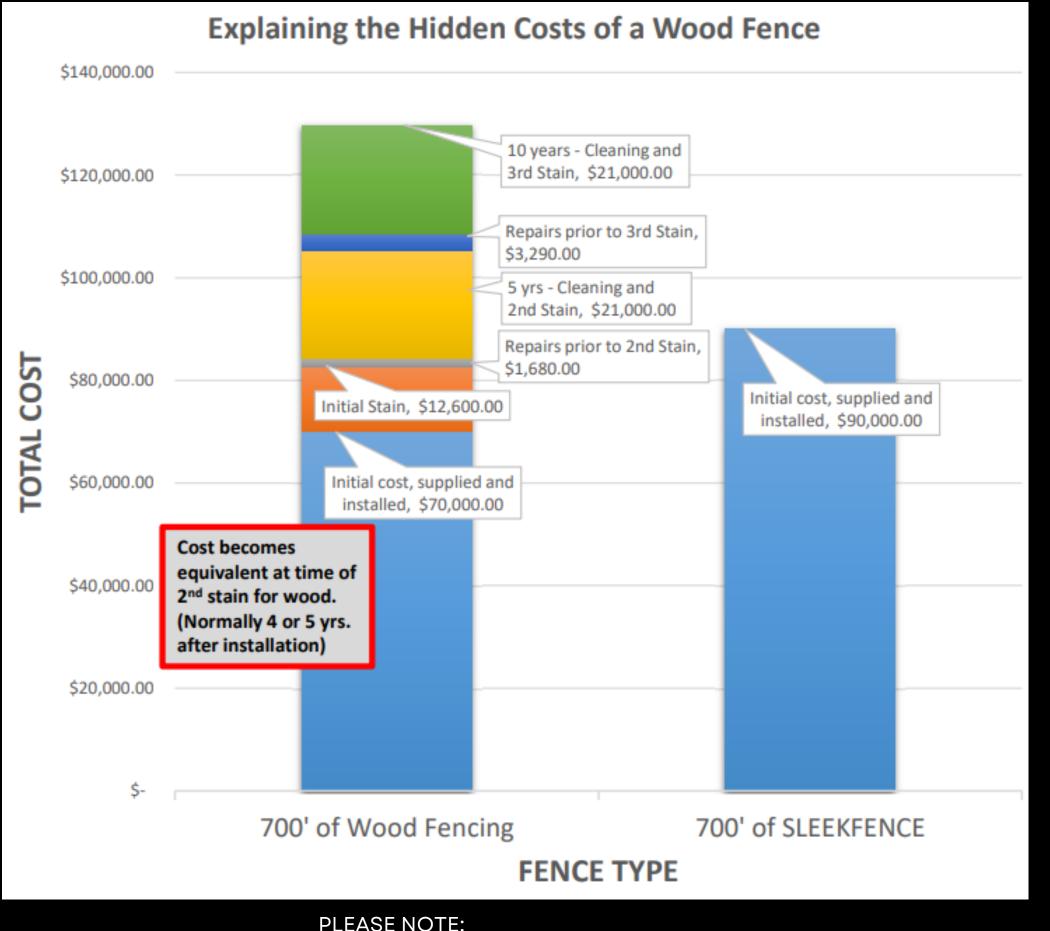

Impervious to moisture, rotting, warping and termites

High grade aluminum, powder coated

Zero maintenance

No splinters, staining or painting-EVER!

Aesthetically pleasing

The preferred product by discerning clientele

Never rusts, aluminum does not rust

Non-combustible (tolerates heat)

Buy right, buy once

Good for the environment - aluminum is ALWAYS recycled

Although this comparison is done with specific reference to 700 linear feet, the cost evaluation is proportionate to any project size.



LOCATION STRATEGY

■ SLEEKFENCE






THE PRODUCT

PRE-ASSEMBLED PANELS


The Concept Behind these Products:

- 1. Panels ship fully assembled for fast and easy installation
- 2. EASILY DISASSEMBLED AND CUSTOMIZED NO WELDED CONNECTIONS.
- 3. Universal sizing, and ONE universal screw
- 4. Easy to order and IN-STOCK

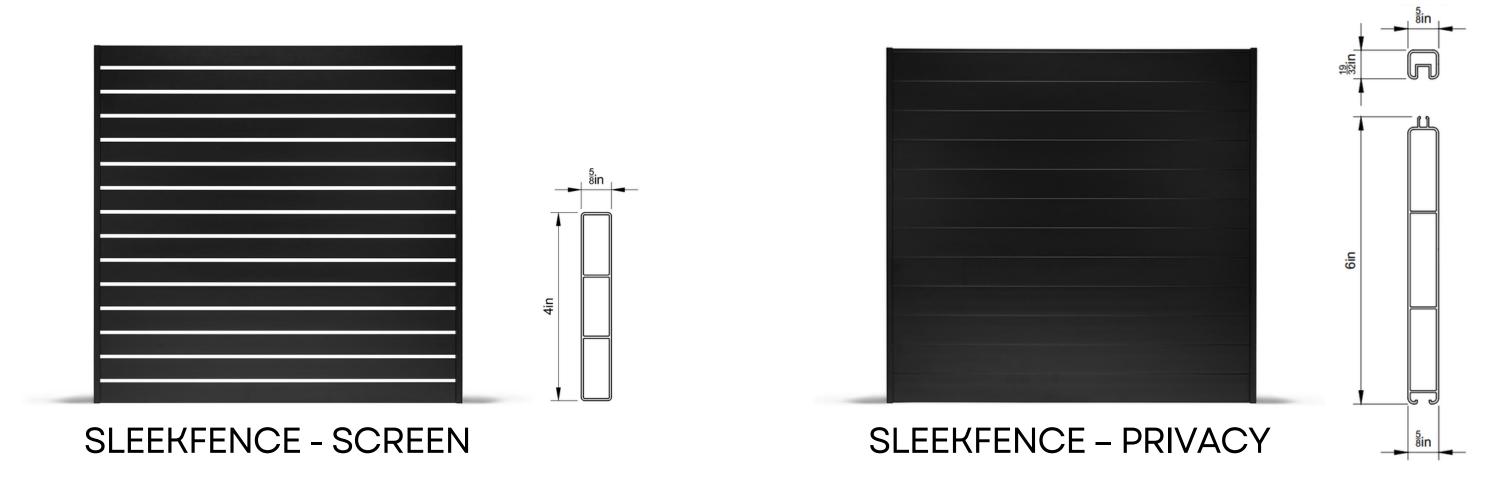



INSTALLATION IMAGES

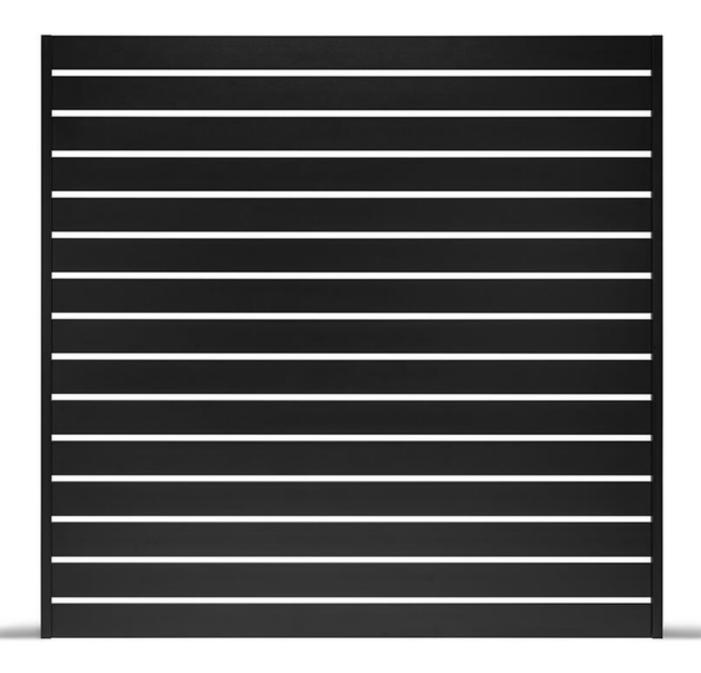

SLEEKFENCE – SCREEN












INSTALLATION IMAGES

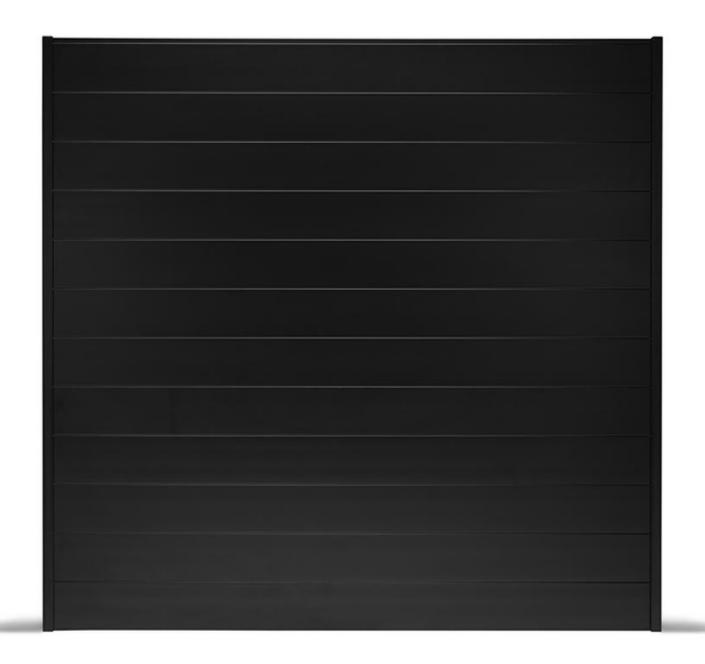







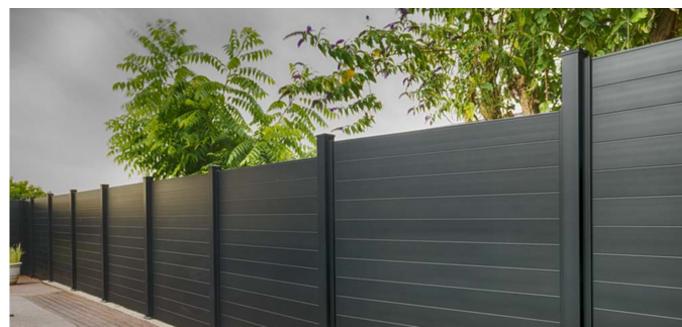


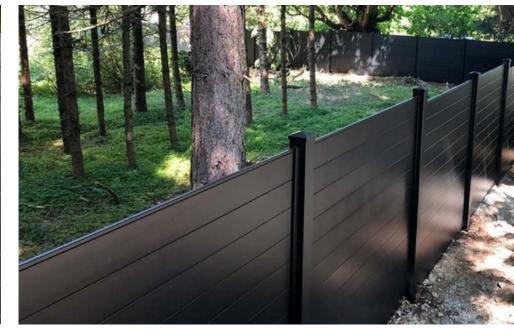

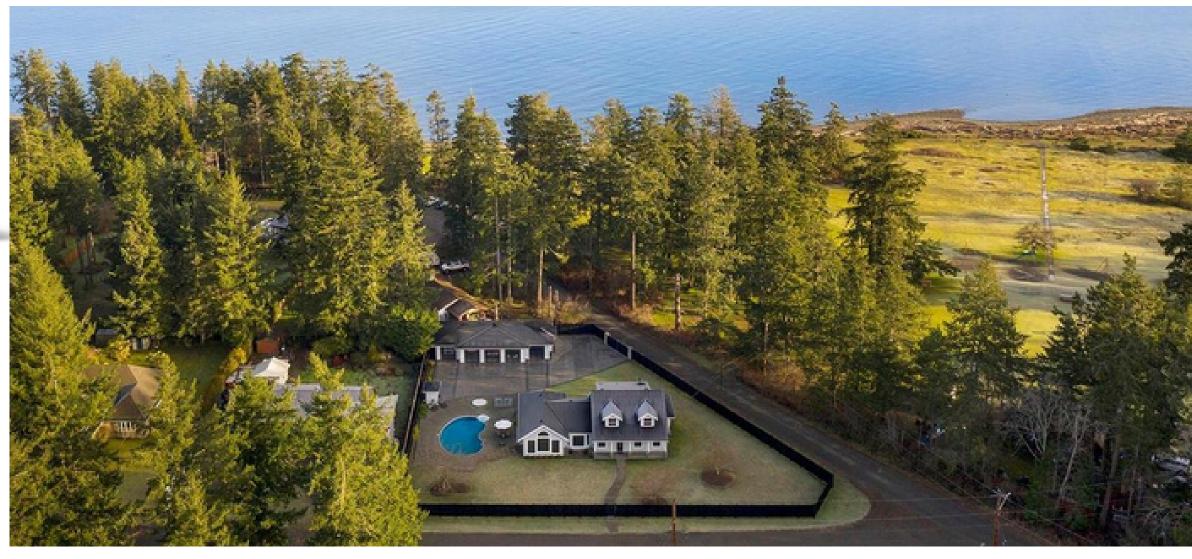

PANEL CONSTRUCTION

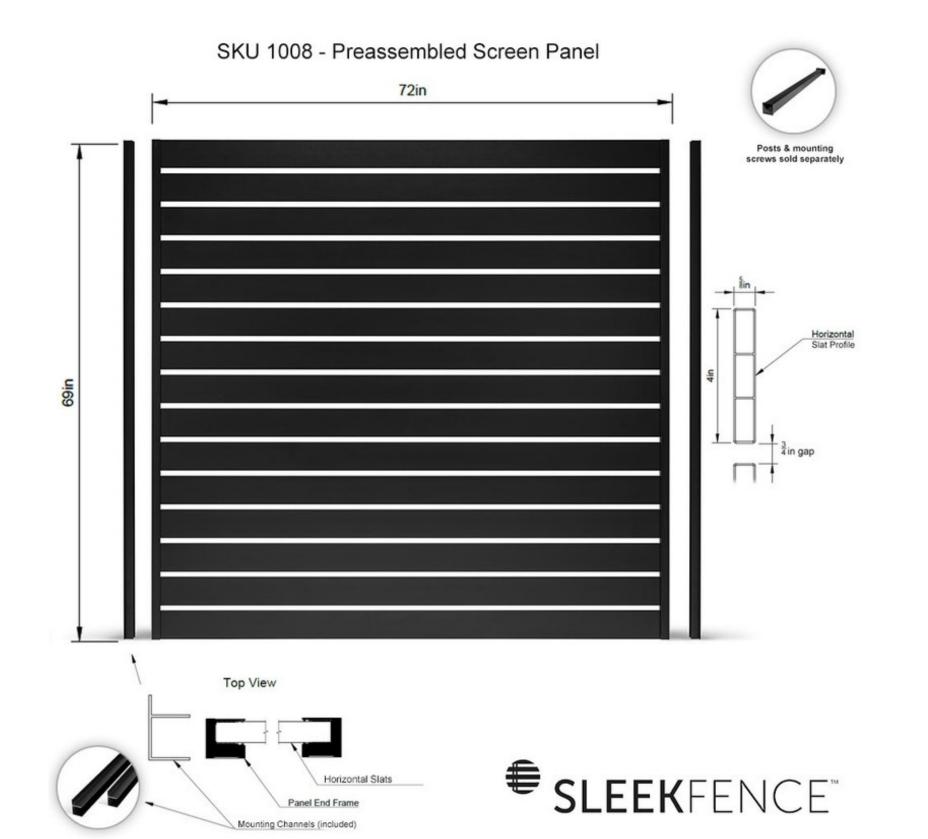


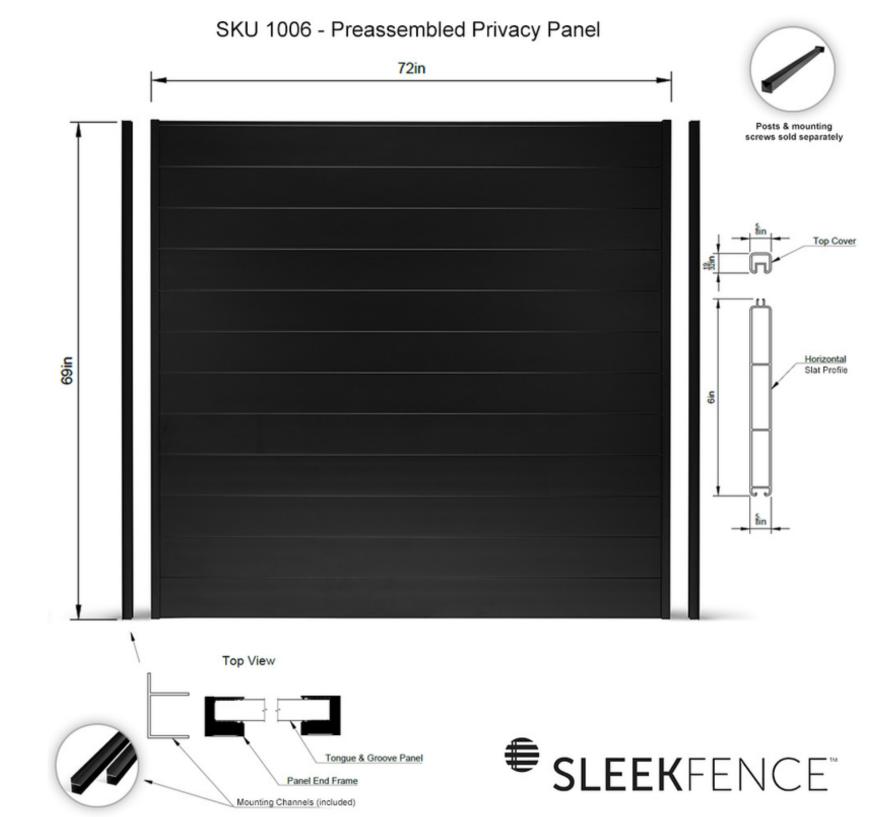



MOUNTING SYSTEM

The 2 main channels:

F-channel

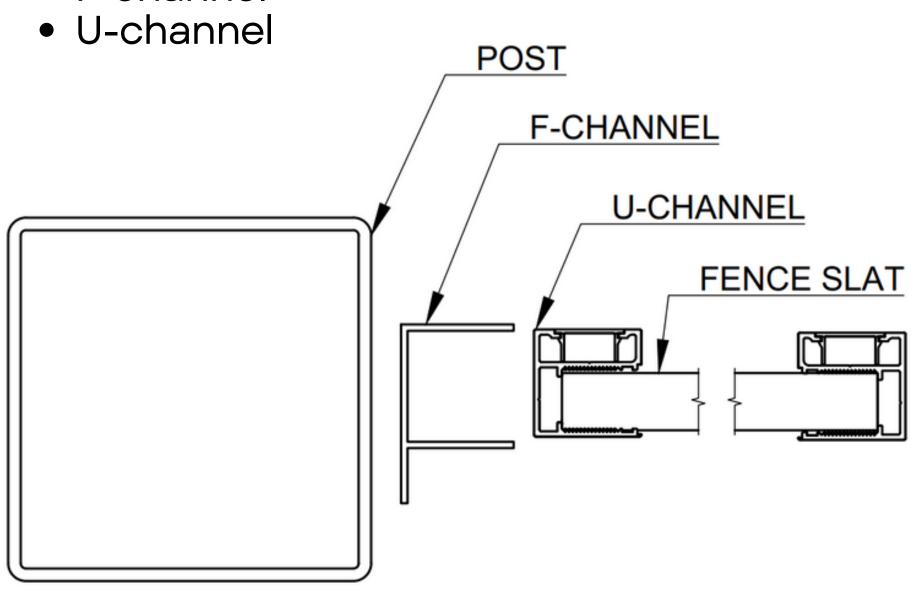

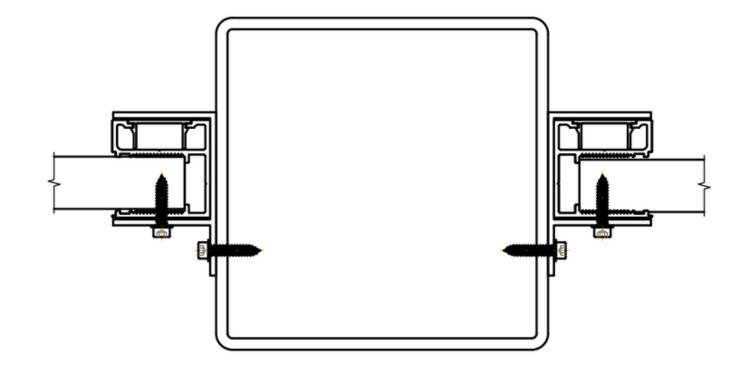

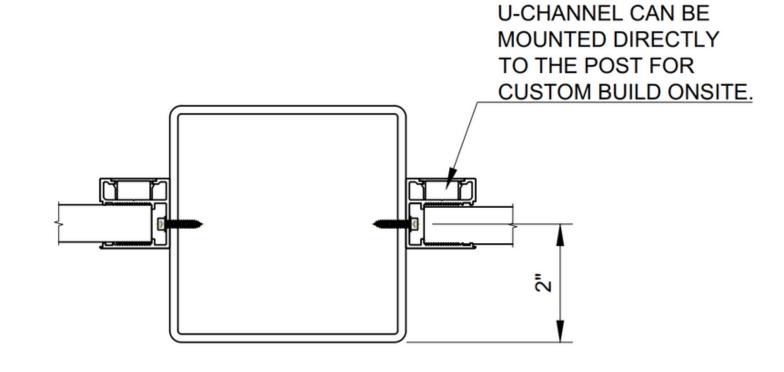




PANEL & POST OPTIONS

• Dig & Set or Concrete Mount posts are fully 4" x 4" and range from 7'-12' in length

Panel - 72" Wide x 69" High

- Custom project engineering available to meet nearly any wind load or fence height requirement.
- Panels can be stacked for EXTRA HEIGHT



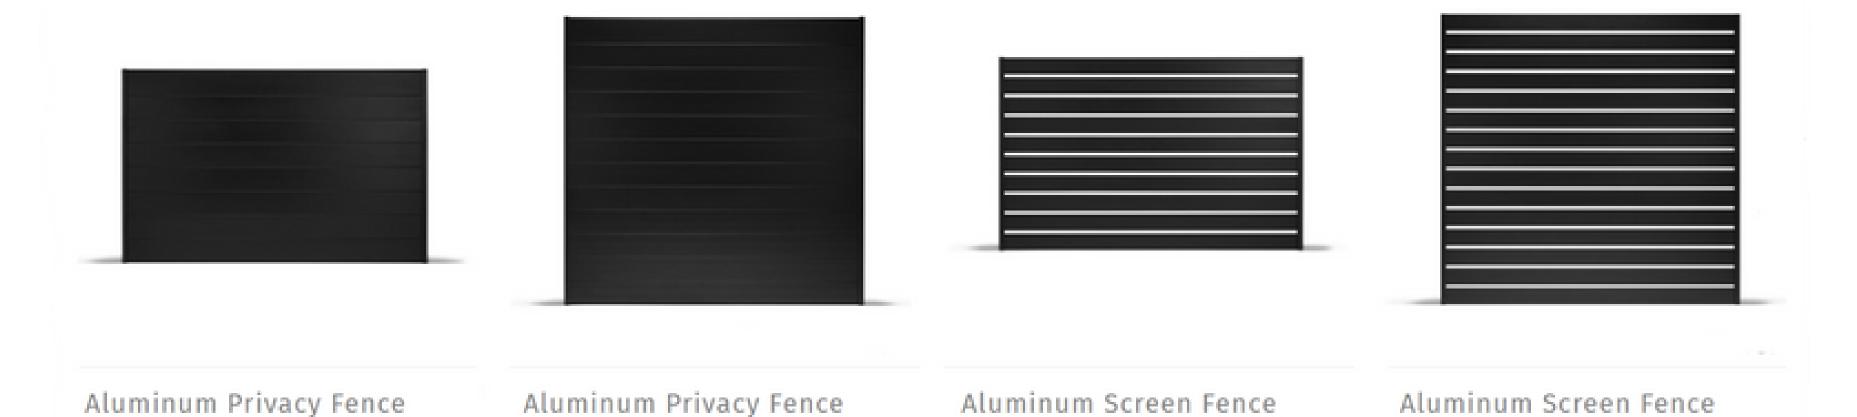

Panel - 72" Wide x 46" High

Privacy Fence slats are 6" wide, interlocking tongue and groove


Screen Fence slats are 4" wide with a 3/4" gap

Panel - 72" Wide x 69" High



Panel - 72" Wide x 46" High


PRE-ASSEMBLED GATES

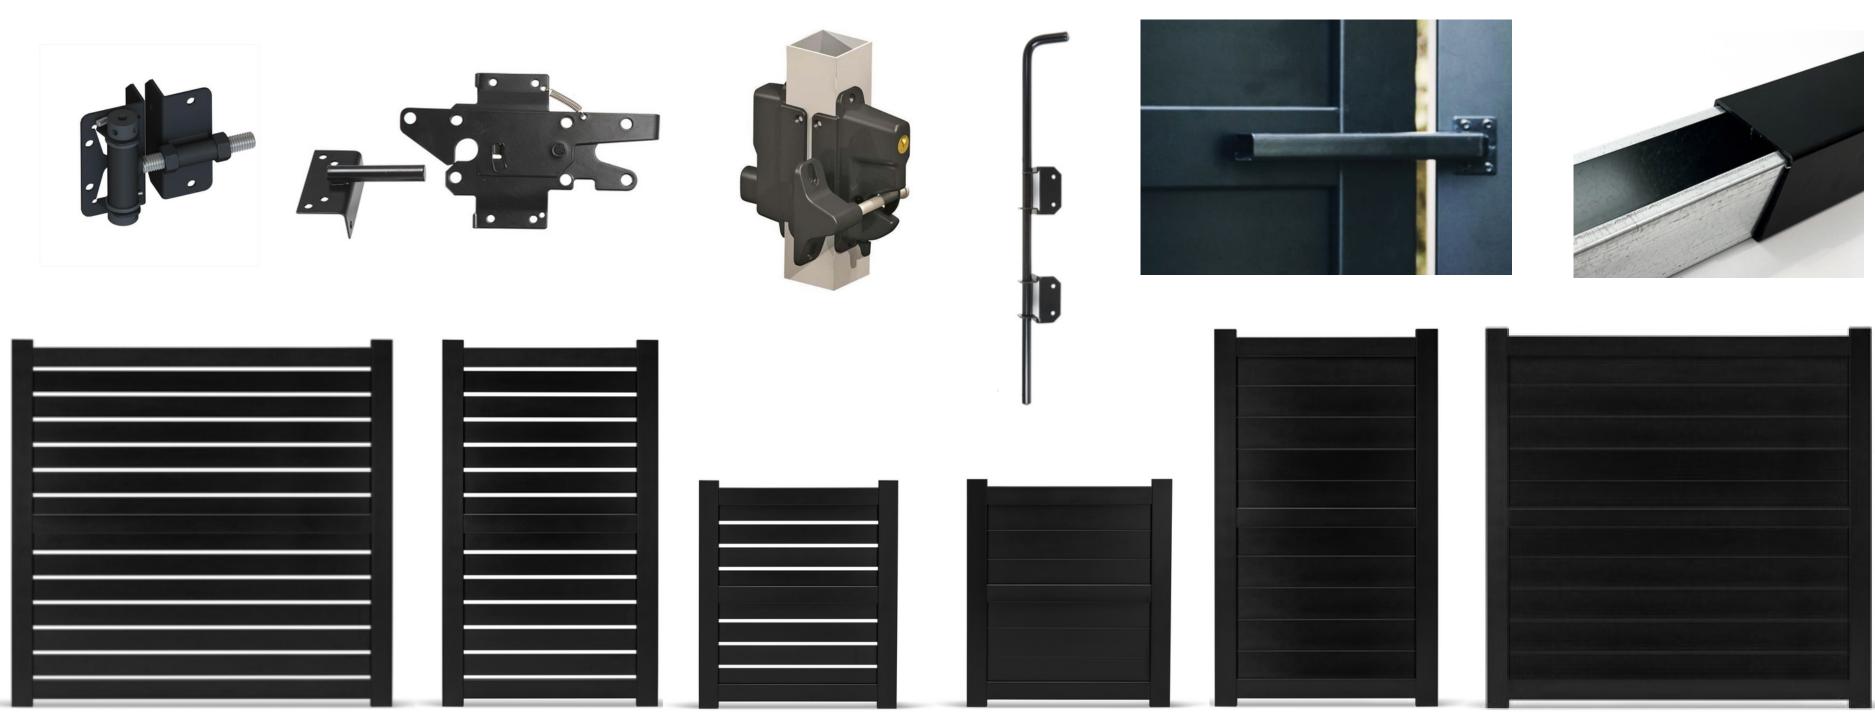



CUSTOMIZABLE -

A truly modular fence system that can be EASILY customized.

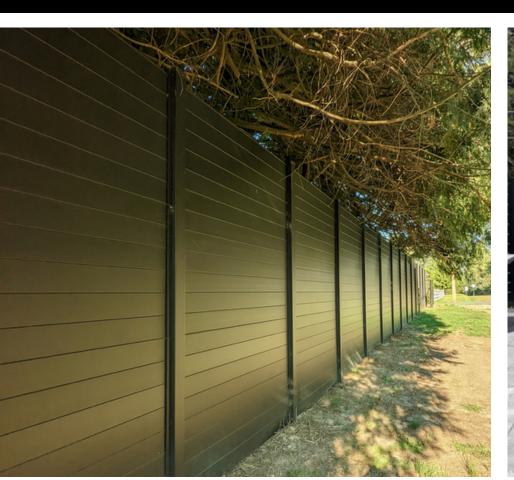










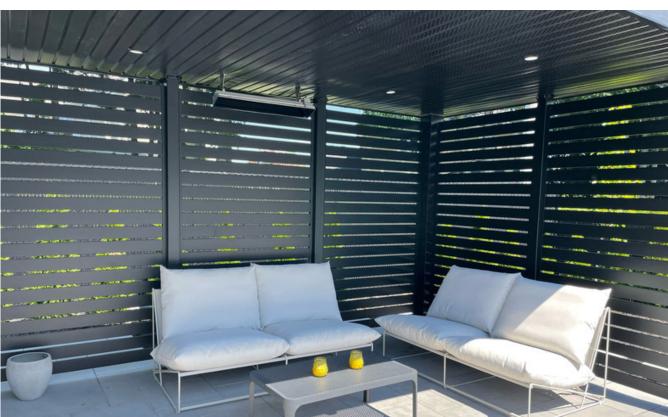

PRODUCT QUALITY

Our manufacturing facility is:

ISO 9001: 2015 Certified

worldwide standard that sets requirements for a strong Quality Management System

A Qualicoat Licenced Coating Applicator

3rd party quality control

Only high-grade Aluminum 6063-T6

grade 6063 has a high resistance to fracture and fatigue and is very strong







SLEEKFENCE WARRANTY

Visit https://sleekfence.com/downloads/ and review our Warranty and Cleaning Instructions

SLEEKFENCE warrants the powder coated finishes against peeling, cracking, separating, or any abnormal discoloration/fading under normal seasonal weather conditions within the following parameters, criteria and conditions:

PARAMETERS	STANDARD	ACCEPTANCE CRITERIA			
Chalking resistance	ISO 4628-7	No chalking on powder coated aluminium profiles in excess of Rating No. 8 based on ASTM D4214 (latest version) for the duration of the warranty *			
Colour retention	ISO 7724-3	No colour change on powder coated aluminium profiles will be greater than as per what is indicated in Qualicoat (at any time in force) Standard (colour tolerances after weathering test) and/or GSB (at any time in force) AL 631 Standard (colour differences after weathering), for the duration of the warranty *			
Cracking	ISO 4628-4	No visible cracking on powder coated aluminium profiles when viewed at 5 meters/16 feet.			

^{*}Where the coating is exposed to long term pollution, industrial or coastal conditions the long-term chalking resistance and colour retention may be affected.

SLEEKFENCE RESOURCES







FAQs

Get answers to commonly asked questions here in our detailed FAQs.



ARTICLES

Helpful articles give you insight into how to creatively use our products.



INSPIRATION GALLERY

Get inspired! Our inspiration gallery will give you ideas for your project.



TRAINING VIDEOS

Our in-depth training videos get you educated on SLEEKFENCE products.



DOWNLOADS

Get detailed product specs and warranty info for our products.



PANEL CALCULATOR

Easily calculate the necessary quantities for your project.



WIND RATINGS

Get technical info regarding wind ratings and tolerance.

THANKYOU

any questions?

1855 875 0855 sam@sleekfence.com support@sleekfence.com